

MFX 1234




Aluminium [AlMg5]

Polerowany









Stal nierdzewna [A2]

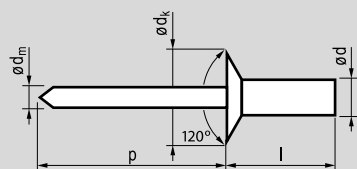Polerowany



szczelne I kołnierz wpuszczany

$\varnothing d$	l [+1/-0,2]		Indeks nr	$\varnothing d_k$	k	$\varnothing d_m$	p		
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[N]	[N]
3,2	9,0	3,0-5,0	12343209	6,0 [+0/-0,4]	-	~1,70	≥ 27	1.245	1.070
[+/-0,08]									
									
$\varnothing 3,3$									
4,0	9,5	3,0-5,0	12344009	7,5 [+0/-0,5]	-	~2,20	≥ 27	2.240	1.710
[+/-0,08]	11,0	4,5-6,5	4011						
									
$\varnothing 4,1$									
4,8	11,0	4,0-6,0	12344811	9,0 [+0/-0,5]	-	~2,63	≥ 27	3.070	2.230
[+/-0,08]	14,0	7,0-9,0	4814						
	18,0	11,0-13,0	4818						
$\varnothing 4,9$									