

ACCUMULATOR CLAMPS

Our accumulator clamps are perfectly suited to hydraulic accumulators.

We make them in different versions, i.e. in electroplated steel or stainless steel, with or without rubber covering, with single or double closure.

Specification:

30 mm band width, 3 mm band thickness, M12 bolt




MPC GS EXTENDED WORM DRIVE HOSE CLAMP

The extended worm drive clamp MPC® 'GS' is intended to be welded to large diameters of metal layers, as in the construction of stainless steel chimneys, for example.

Equipped with a 6 mm hexagonal screw with shank, this clamp ensures better guiding when it is undone. It is available in band widths of 9 and 12 mm and in stainless steel AISI 304.

This clamp can also be made according to the client's requirements.

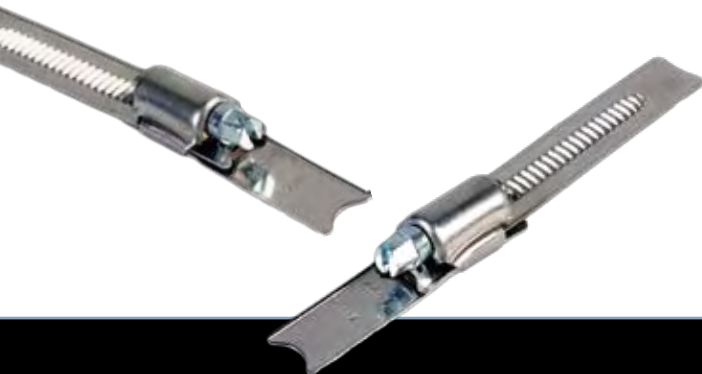

MPC UC UNIVERSAL HOSE CLAMP

| Ø mm | Reference | Stock |
|-------------|-----------|-------|
| | W4 | |
| 20 – 43 mm | MPUC020 | √ |
| 45 – 100 mm | MPUC045 | √ |

Hose clamp MPC® 'UC' is intended for securing universal joint bellows and offers professionals numerous advantages. Since the blocking system accommodates an infinite number of clamping diameters, the clamp can be used for a multitude of applications where safety, strength and longevity are required. Also, it is deburred on both faces, so there is no risk of cutting hands or the bellows.

Simple and easy to use, the wrenches are compact and light and do not damage the bellows. Using a simple turn-buckle, the clamp is tensioned and blocked in the right position.

The professional does not lose time trying to find the clamp with the right diameter – just 2 types cover a clamping range of 20 mm – 100 mm. The MPC hose clamp is complete, without clips or other additional loose parts, and does not require a special tool to fit.

Each clamp is made in stainless steel AISI 304.

