
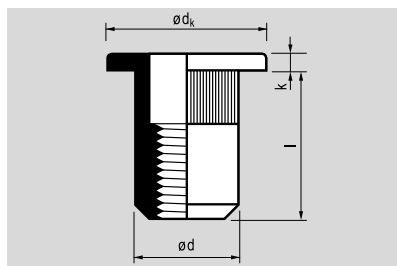


Stal
O cynk



MASTERGRIP | otwarte | kołnierz cylindryczny

Ø d	l [+0,6/-0,1]		Indeks nr	Ø d _k	k	Ø d [+0/-0,12]			
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[Nm]	[N]	[N]
M3	10,0	0,5-3,0	23M03C030	7,0 [+0/-0,5]	≤0,9	4,9	3,0	4.900	990
 Ø 5,0									
M4	10,0	0,3-3,0	23M04C030	9,0 [+0/-0,5]	≤1,1	5,9	4,5	7.840	1.660
 Ø 6,0	11,5	3,1-4,0	C040	9,0 [+0/-0,5]	≤1,1	5,9	4,5	7.840	1.660
M5	12,0	0,3-3,0	23M05C030	10,0 [+0/-0,5]	≤1,1	6,9	6,0	11.070	2.760
 Ø 7,0	15,0	3,1-4,0	C040	10,0 [+0/-0,5]	≤1,1	6,9	6,0	11.070	2.760
M6	14,5	0,5-3,0	23M06C030	12,0 [+0/-0,5]	≤1,6	8,9	20,0	17.640	3.430
 Ø 9,0	16,0	3,1-4,5	C045	12,0 [+0/-0,5]	≤1,6	8,9	20,0	17.640	3.430
M8	16,0	0,5-3,0	23M08C030	15,0 [+0/-0,5]	≤1,6	10,9	29,0	27.440	4.410
 Ø 11,0	18,5	3,1-5,5	C055	15,0 [+0/-0,5]	≤1,6	10,9	29,0	27.440	4.410
M10	17,0	0,5-3,0	23M10C030	16,0 [+0/-0,5]	≤2,1	11,9	32,0	28.420	4.900
 Ø 12,0	22,0	3,0-6,0	C060	16,0 [+0/-0,5]	≤2,1	11,9	32,0	28.420	4.900
M12	23,0	1,0-4,0	23M12C040	22,0 [+0/-0,5]	≤2,1	15,9	43,7	48.020	6.860
 Ø 16,0									